


Product Data Sheet

Strapping Material

General Information

Strapped markers use a tough, flexible, composite material as the backing. The material has two reinforcing fabric layers for robustness.

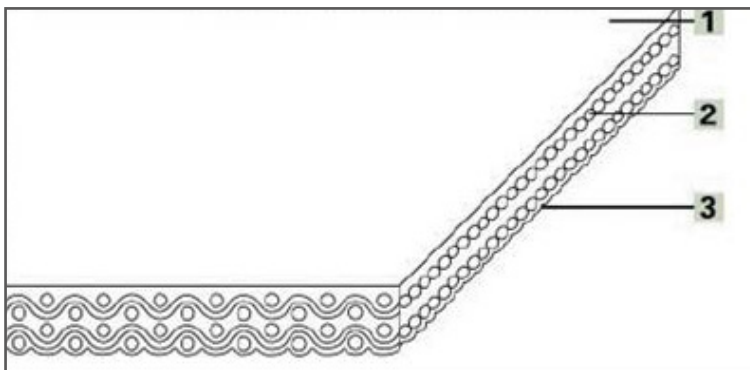

1. **Upper Layer:**
Polyvinylchloride (PVC)
2. **Reinforcing Fabric 1:**
Polyester (PET)
3. **Reinforcing Fabric 2:**
Polyester (PET), impregnated
Polyurethane (PUR)

Technical Data

Characteristic	Value
Thickness	2mm
Operating Temperature (Continuous)	-20°C to 80°C
Tensile Strength	10 N / mm (57 lbs / in)
Mass of Belt	2.5kg / m ²
Maximum Size (Un-Jointed)	2000mm

Environmental Characteristics

The strapping material has been selected due to its resistance to Seawater. A full chemical resistance chart can be provided if specific conditions are anticipated.

Availability

Strapping material is held as a stock item.



Product Data Sheet

Aquahesive™ 5836

4 Points Commercial Centre
Craigshaw Road
Aberdeen, AB12 3AP

T: 01224 897060
E. info@aquasign.com
w: www.aquasign.com